






Chimney hood ss 900 wide

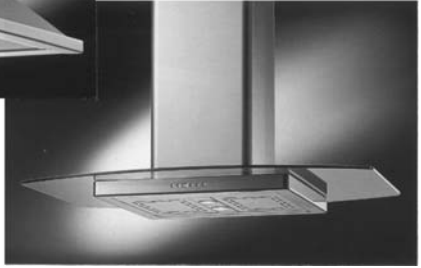


Island hood ss and glass 900 wide

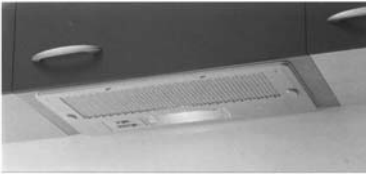

Canopy hood 524 wide



Integrated hood 600 wide

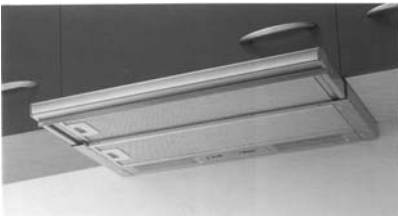

Telescopic hood 600 wide



Standard hood 600 wide

**Cooker hoods – by Baumatic**

## Cooker hood features

The following features may be included:

lights	typically 2 × 20 W halogen lamps
speed level switch	usually for 3 levels
automatic sensor	humidistat
run-on facility	timer set for fan to overrun
interval ventilation	to ventilate room periodically
charcoal filter	for re-circulating models
grease filter	for extraction models
saturation indicator	for filter changing/washing
splashback	matching splashback, often sold together with range cookers

## Hob extractors

In addition to the extractors described above, there are also *hob extractors*. These are NOT suitable for gas hobs and are not as efficient as overhead cooker hoods. However, they can be useful alongside electric barbeque hobs which can emit noxious fumes at hob level or where uninterrupted headroom or view is desirable.

They are designed to be set alongside domino hobs in island or peninsular worktops. They extract the air downwards through 125 mm diameter ducts into base cabinets and horizontally to outside.

The fan is positioned either at the bottom of the base cabinet or externally at the end of the horizontal duct.

It is not always easy to accommodate the horizontal duct unless there is convenient floor joist space or it can be carried along the ceiling of a floor below.

See illustration overleaf.